

Cost-effective, compact, all-weather measurement of construction materials and farm feeds.


The Loadrite® S1100 is an on board scale that helps the operator to accurately weigh every lift, track loading totals, prevent overloading and effectively manage stock. So you can improve safety and profitability through increased efficiency and accuracy.

The S1100 is suitable for use on tractors, forklifts and skidsteers, across a range of applications and machine sizes, brands and models.

Features

- Easy to use four-key user interface enables quick and easy operation.
- Weigh across multiple attachments such as bucket, forks, hay squeezer, soft hands and more—supports up to 9 attachments.
- Compact size requires minimal space in the cab, ideal for smaller machines.
- Simple push button weighing. Accuracy with ±2%.
- Designed for rugged environments, suitable for use in open cabs or exposed, wet or dusty environments (IP67 rating).



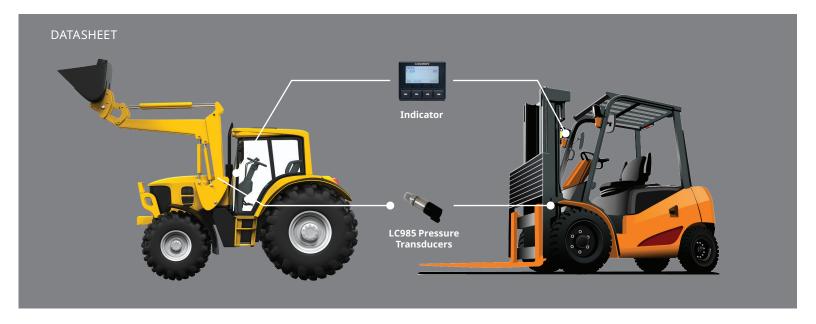

Applications

Machines

· Tractors, forklifts, and skidsteers.

Attachments

- Bucket, forks, hay squeezer, soft hands and more.
- Up to 9 attachments.

Agriculture

- Weigh/mix feed to ensure optimal feed ratios.
- · Weighing hay bales to identify wet bales and correct supply.
- Weigh incoming/outgoing stock for accurate invoicing and stock keeping.

Construction/landscaping

- Weigh customer purchases to prevent under/over billing.
- Track product sold and on hand for accurate stock management and purchasing.
- Eliminate overloading of vehicles for greater safety.

Warehousing

- Consolidate weights with consignment notes to track and manage stock accurately.
- Prevent over-stacking/over-loading damage to products.
- Comply with defined machine payload ratings to reduce machine wear and accidents.
- Ensure health and safety requirements compliance for a safer workplace.

Specifications

Weighing Functions

 Static Weighing, Bucket Overload Warning, Zero, Undo, up to 9 different attachments (bucket, forks etc)

Data/Metrics Functions

- 1 product short and long total
- Bucket/fork load count

Power Requirements

Supply voltage	to 28.8 V DC
Current consumption 30	0 mA typical
Power supply protection	3 A fuse

Physical Specifications

Indicator weight	
Indicator dimensions W107.9 x L89.9 x	D39.9 mm (4.2 x 3.5 x 1.5 in)
Indicator operating temperature2	25°C to 85°C (-13°F to 185°F)
Environmental protection	IP67
Chemical resistance	ISO 16750-5 EP 455 5.8.2

Other Information

- Supported languages: English
- Warranty: 1 year on parts

Contact your local dealer today

BRISBANE	TOWNSVILLE	SYDNEY	SYDNEY - WASTE
U4, 29 Links Avenue North	11-13 Casey Street	U13, 7-9 Progress Circuit	Unit 33 A/1 3 Endeavour Rd
Eagle Farm QLD 4009	Townsville QLD 4814	Prestons NSW 2170	Caringbah NSW 2229
P: 1800 655 860	P: 1800 655 860	P: 1800 656 860	P: 1800 655 860
M: 0499 890 093	M: 0499 890 093	M: 0408 964 134	M: 0419 244 995
Reception.QLD@SmartTech.com.au	Reception.QLD@SmartTech.com.au	Reception.NSW@SmartTech.com.au	Waste@SmartTech.com.au
MELBOURNE	ALBURY/WODONGA	TASMANIA	PERTH
11B The Crossway	408/4 Wagga Road	PO Box 315	U1, 8 Hasler Road
Campbellfield VIC 3061	Lavinton NSW 2641	Newstead TAS 7250	Osborne Park WA 6017
P: 1800 655 860	P: 1800 655 860	P: 1800 655 860	P: 1800 655 860
M: 0427 766 125	M: 0459 965 187	M: 0427 766 125	M: 0407 912 821



